




Rating	10A 125 VAC, 20A 277 VAC	Mount Hole		Circuit Structure	
Contact R	50m ohm Max.				
Insulation R	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Circuit	3P SPDT (ON)-OFF-(ON)				
Operation Force	800g±200g				



1 HEX NUT ASSY
1 BLACK KNURL NUT ASSY
Packing: As GB's standard pack
(1 pce/blister card, 5 pc
/box stick with one label)

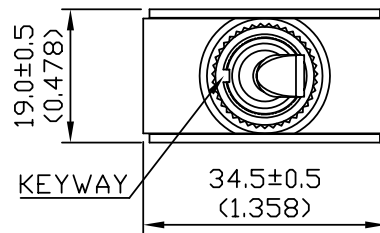